

3-JAW CONCENTRIC GRIPPERS WITH LONG STROKE

SERIES GED6000IL

▶ PRODUCT ADVANTAGES



“Highest performance”

- ▶ **5 million maintenance-free cycles**
- ▶ **Integrated sensing via IO-Link**
- ▶ **Servo drive with integrated controller**

Brushless drive technology, position, speed and force control guarantee the highest amount of functionality

▶ **IO-Link on board**

In addition to the unshielded single-cable solution, the future-proof, hot-pluggable activation provides you with a wide variety of travel profiles for easy implementation into your control system

▶ **Gentle yet powerful**


Power version -03 for handling heavy workpieces with mechanical self-locking and version -31 for gently gripping of delicate parts

▶ SERIES CHARACTERISTICS

Installation size		Version	
GED60XXIL		-03	-31
 Powerful		•	
 Gentle			•
 Gripping force adjustable		•	•
 High movement speed			•
 Integrated sensing		•	•
 Positionable		•	•
 IO-Link		•	•
 Self locking mechanism		•	
 5 million maintenance-free cycles (max.)		•	•
 Cleanroom-certified		•	•
 IP54		•	•



► BENEFITS IN DETAIL

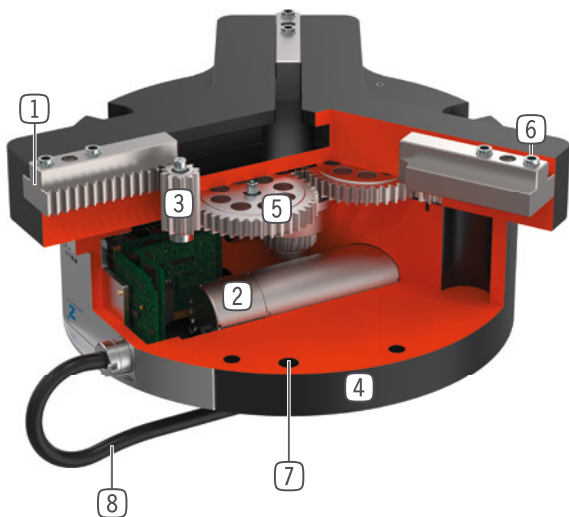

- ① Precise T-Slot guide**
 - high forces and moments capacity
- ② Drive**
 - Brushless DC servomotor
- ③ Rack and pinion gear**
 - synchronized the movement of the gripper jaws
 - high force transfer
- ④ Robust, lightweight housing**
 - Hard-coated aluminum alloy
- ⑤ Helical worm gear**
 - self locking mechanism in case of power drop (only version -03)
- ⑥ Removable centering sleeves**
 - quick and economical positioning of the gripper fingers
- ⑦ Mounting and positioning**
 - mounting possible from several sides for versatile positioning
- ⑧ Energy supply**
 - standardized connector

► TECHNICAL DATA

Installation size	Stroke per jaw, adjustable	Gripping force	Weight	IP class
	mm	[N]	[kg]	
GED6000IL	40	15 - 800	2,8	IP54
GED6100IL	40	210 - 1700	4,9	IP54

► FURTHER INFORMATION IS AVAILABLE ONLINE




All information just a click away at: www.zimmer-group.com. Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.

3-JAW CONCENTRIC GRIPPERS WITH LONG STROKE

INSTALLATION SIZE GED6040IL


PRODUCT SPECIFICATIONS

 **IO-Link**




Gripping force diagram

GED6040IL-03-A

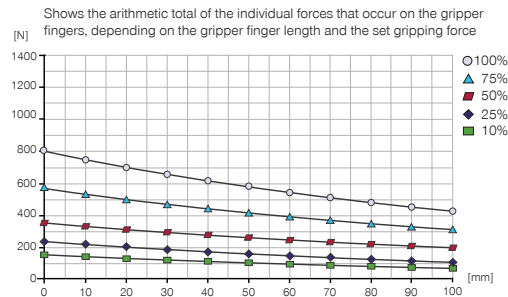

Forces and moments


Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	25
Mx [Nm]	25
My [Nm]	25
Fa [N]	500

Gripping force diagram

GED6040IL-31-A

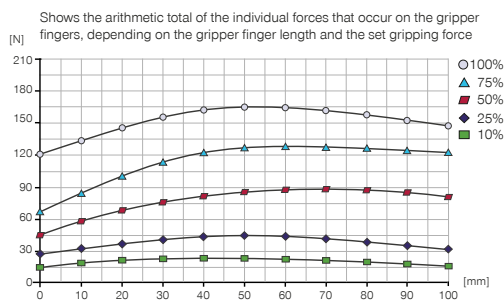

INCLUDED IN DELIVERY



6 [piece]
Centering Disc
DST40400

RECOMMENDED ACCESSORIES



CONNECTIONS / OTHER



 IO-Link

KAG500IL

Plug-in connector straight 5 m - plug, female connector M12



 IO-Link

B12-Y-5IL

Y-Plug-in Connector



CONNECTIONS / OTHER



SCM-C-00-00-A


Smart Communication Module

3-JAW CONCENTRIC GRIPPERS WITH LONG STROKE

SERIES GED6000IL FUNCTIONAL DESCRIPTION




CONNECTIONS / OTHER

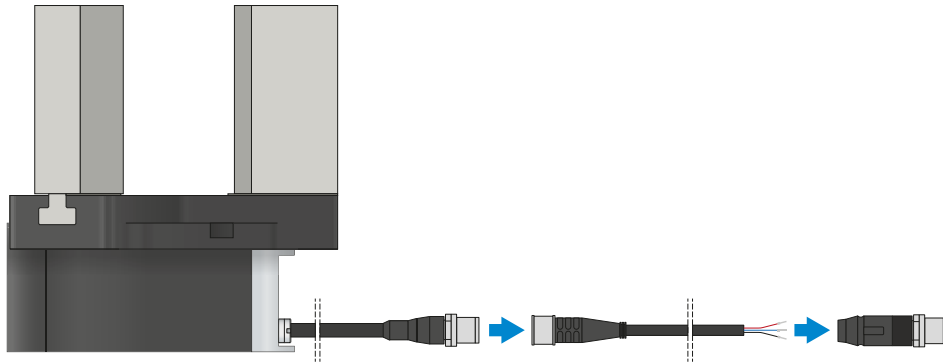

Plug-in connectors

For extending and fabricating the connection lines

Cables with a length of 10 m with exposed leads are available. Depending on the specific needs, the cables can be shortened or fabricated with connectors in sizes M12. A 5 m long cable with male connector / female connector is available for the IO-Link connection.

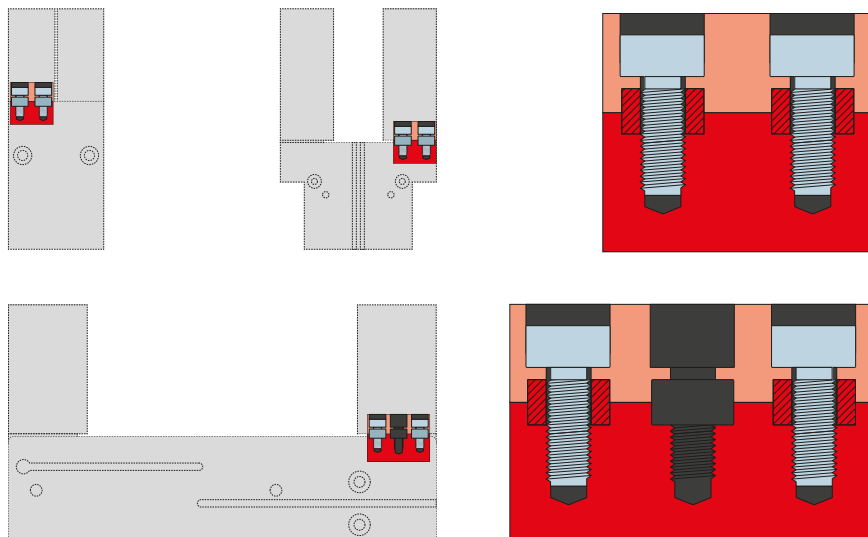

Centering sleeves


For defined position measurement of the gripper fingers

The centering sleeves are inserted into the fits of the gripper jaws to define the position of the gripper fingers. The centering sleeves are comparable to a pin connection.


SECURED CONFIGURATION EXAMPLES

GED6000IL SERIES


► GED6000IL (IO-LINK) WIRING TO CONTROL CABINET (BECKHOFF)

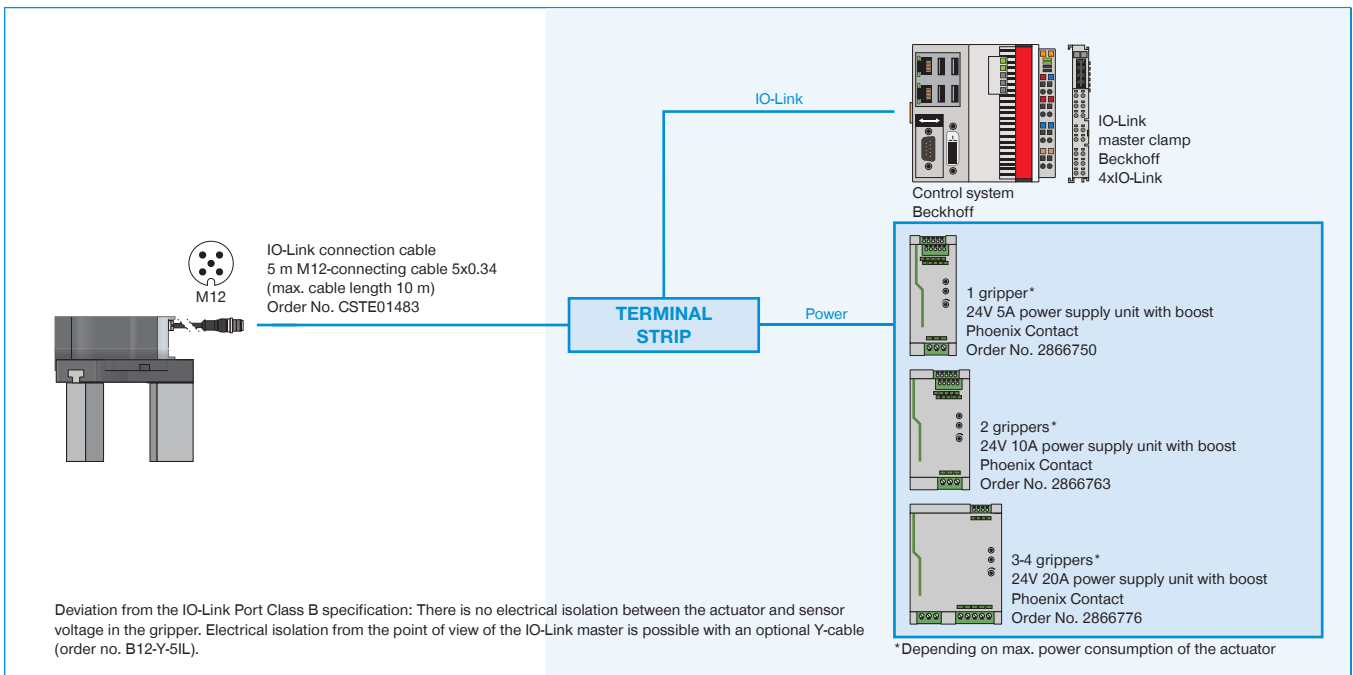


► GED6000IL (IO-LINK) WIRING TO CONTROL CABINET (SIEMENS)

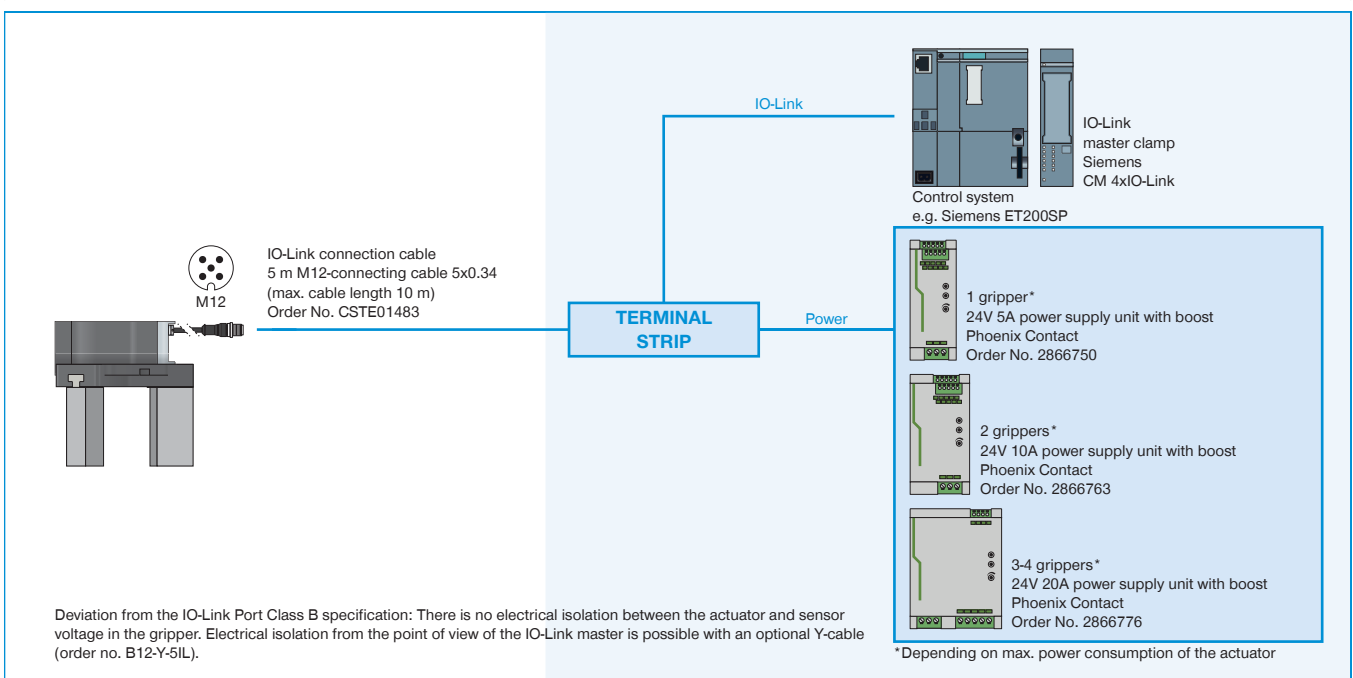


► GED6000IL-03-A WIRING TO IO-LINK MASTER IP67 (BECKHOFF)

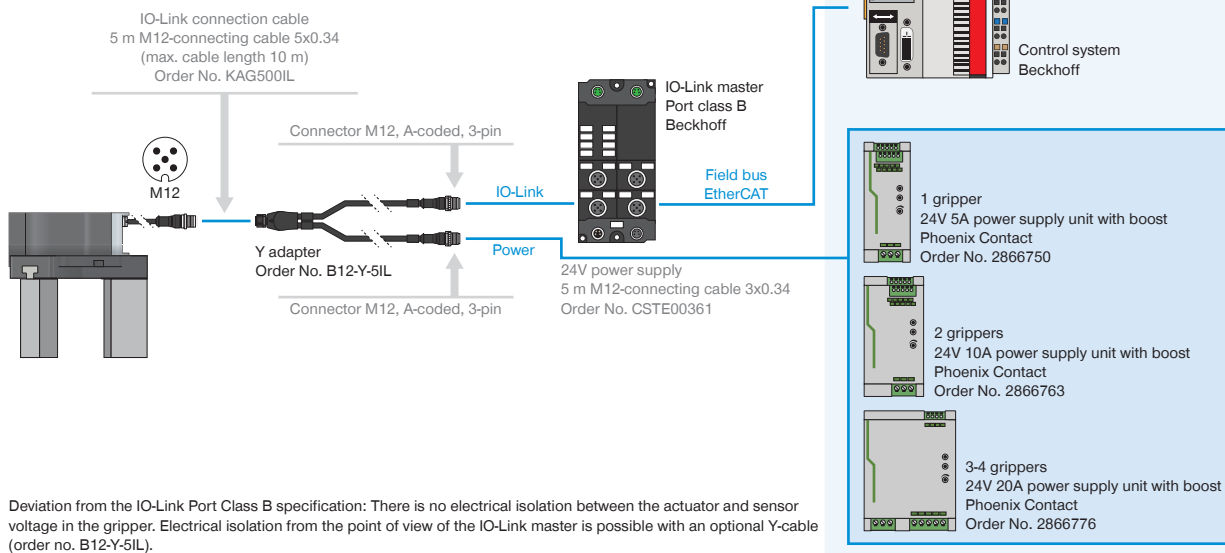


► GED6000IL-31-A WIRING TO IO-LINK MASTER IP67 (BECKHOFF) WITH 1-2 GRIPPERS

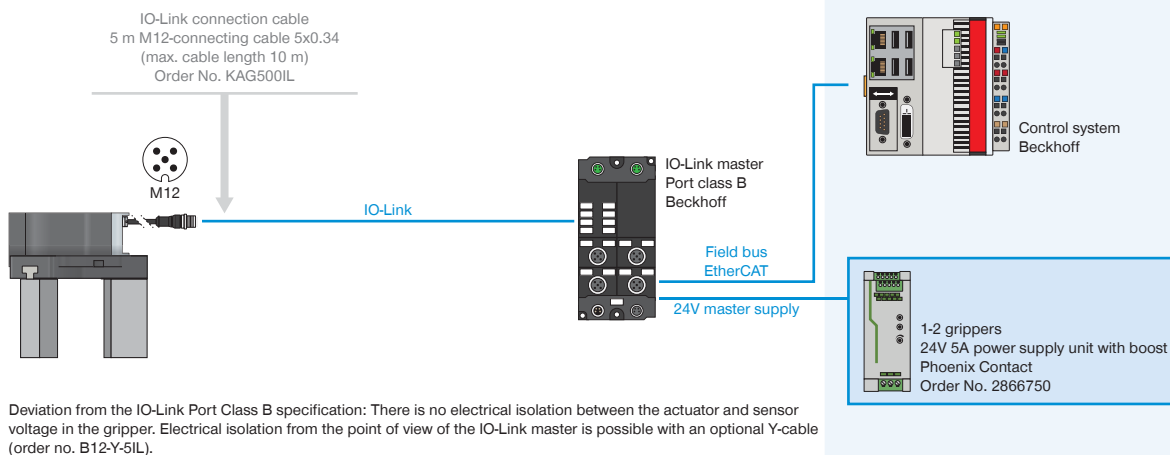


► GED6000IL-31-A WIRING TO IO-LINK MASTER IP67 (BECKHOFF) WITH 3-4 GRIPPERS

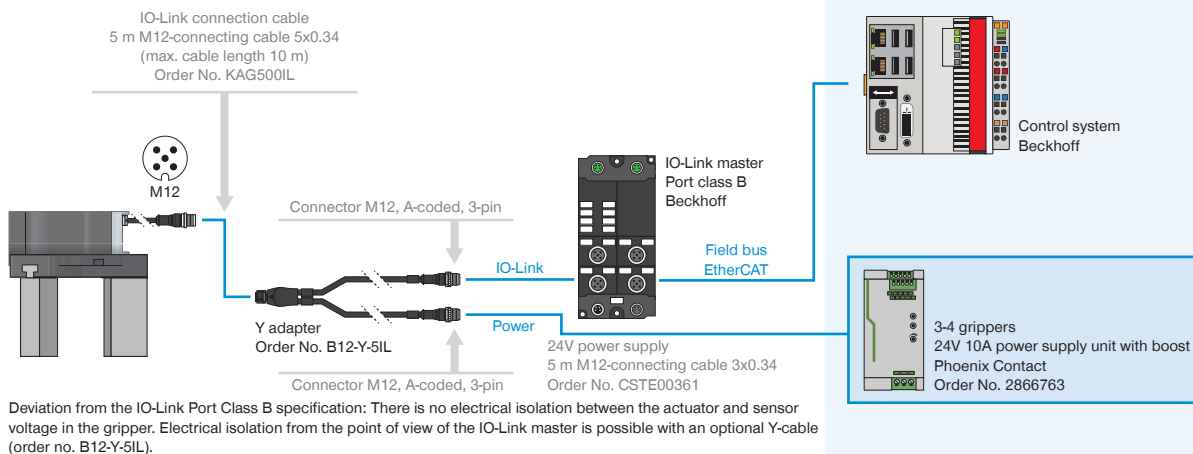

► GED6000IL-03-A WIRING TO IO-LINK MASTER IP67 (BECKHOFF)

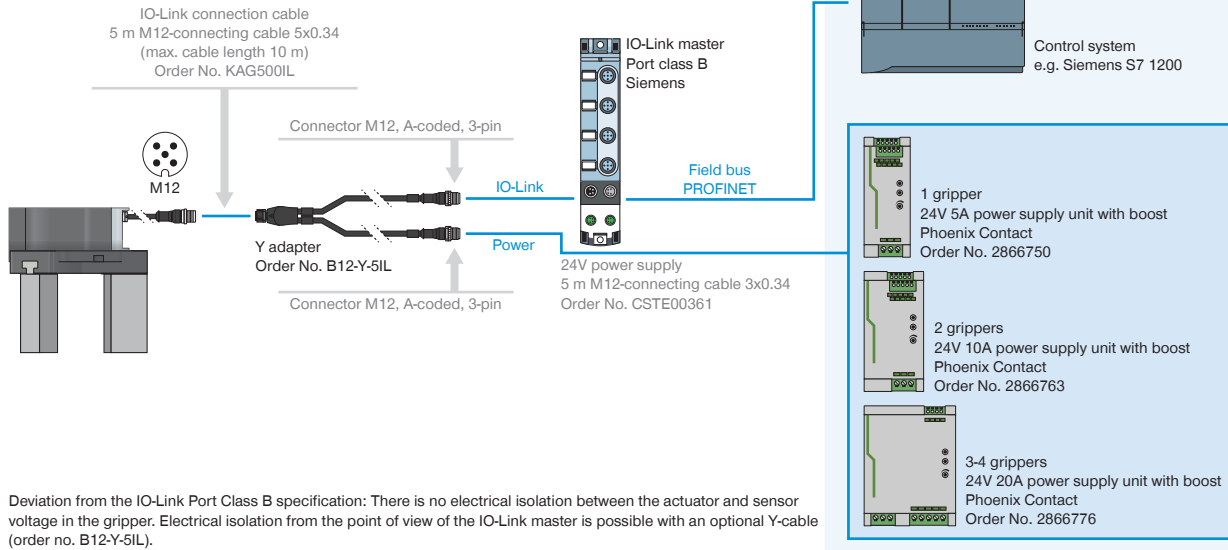

► GED6000IL-31-A WIRING TO IO-LINK MASTER IP67 (SIEMENS) WITH 1-2 GRIPPERS

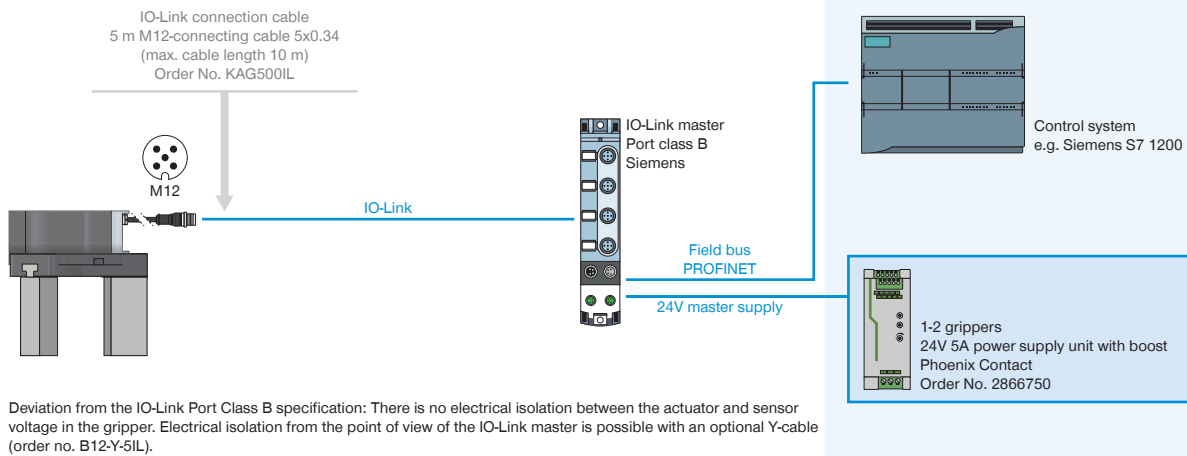

► GED6000IL-31-A WIRING TO IO-LINK MASTER IP67 (SIEMENS) WITH 3-4 GRIPPERS

